



**iQ100, telescopic cooker hood, 60 cm,
Silver metallic
LI63TCA10M**



The powerful telescopic cooker hood practically disappears into the upper cabinet.

Features

Technical Data

Typology : Pull-out
Approval certificates : CE, Eurasian
Length electrical supply cord : 150 cm
Required niche size for installation (HxWxD) : 135mm x 598.0mm x 264mm mm
Net weight : 7.6 kg
Type of control : mechanical
Number of speed settings : 3
Maximum output air extraction : 305 m³/h
Maximum output recirculating air : 220 m³/h
Number of lights : 2
Noise level : 67 dB(A) re 1 pW
Diameter of air outlet : 150 mm
Grease filter material : Washable aluminium
Odour filter : No
Operating Mode : Convertible
Optional accessories : LZ11IXK19, LZ29000
Total power of the lamps : 8 W
Grease filter type : Kasette
Connection Rating : 153 W
Voltage : 220-240 V
Frequency : 50 Hz
Plug type : Gardy plug w/ earthing, GB plug
Installation typology : Built-in
Material body : Lacquered
Approval certificates : CE, Eurasian
Plug type : Gardy plug w/ earthing, GB plug
Dimensions of the product, with chimney (if exists) (in) : / x x
Dimensions of the packed product : 14.56 x 10.03 x 25.86
Net weight : 17.000 lbs
Gross weight : 19.000 lbs
Motor location : Integrated motor in hood body
No-return airflow flap : No
Length electrical supply cord : 150 cm
Dimensions of the product, with chimney (if exists) : 175 x 598.0 x 300.0 mm
Dimensions of the packed product (HxWxD) : 370 x 255 x 657 mm
Net weight : 7.6 kg
Gross weight : 8.5 kg





iQ100, telescopic cooker hood, 60 cm, Silver metallic LI63TCA10M

Features

Variant:**Design:**

- Stainless steel handle strip

Comfort:

- Suitable for ducted or re-circulated extraction
- 3 speeds control
- Single motor
- Metal grease filter, dishwasher safe

Environment and Safety:

- Energy Efficiency Class: D*
- Average Energy Consumption: 88.6 kWh/year*
- Blower Efficiency Class: F*
- Lighting Efficiency Class: D*
- Grease Filtering Efficiency Class: C*

Technical information:

- Ducted extraction rate according to DIN/EN 61591 max. 305 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 67 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
- Noise min./max. Normal Level: 53/67 dB*
- Power rating: 153 W
- Light Intensity: 100 lux
- Colour Temperature: 3000 K

Measures:


- 150 or 150 mm diameter pipe

* In accordance with the EU-Regulation No 65/2014



iQ100, telescopic cooker hood, 60 cm,
Silver metallic
LI63TCA10M

Dimensioned drawings

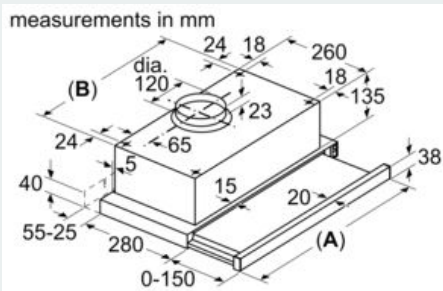

Hood Type	A	B	Hood Type	A	B
450	448	348	700	698	598
500	498	398	800	798	698
550	548	448	900	898	798
600	598	498			